

DIGIDIM 1000 W Universal Dimmer (452)


The DIGIDIM 1000 Watt Universal Dimmer is a DALI-compatible lamp interface unit for use in a DIGIDIM lighting control system. The dimmer is a DIN-rail-mounted unit that can control a maximum load of 1000 W at 230 V.

It has two operating modes, either of which can be used with mains-voltage lamps:

- Trailing-edge mode is for use with low-voltage lamps with electronic transformers.
- Leading-edge mode is for lamps with magnetic transformers, provided that the transformers are approved for dimming use by their manufacturers.

The dimmer is provided with a status LED and a physical selection switch that can be used to identify the device during system configuration.

The dimmer is also provided with an optional addressing switch that allows simple DALI grouping of the device. The default position '0' allows the normal grouping with DIGIDIM remote controller, Toolbox or Designer software.

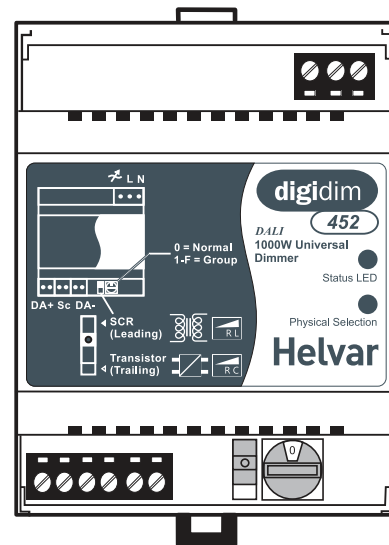

Key Features

- Out-of-box operation. No programming required when using DIGIDIM slider, rotary, or push button panels. For scene panels, 'preset download' must be carried out.
- Input voltage fluctuation compensation ensures stable output levels with fluctuating incoming mains levels.
- Group-selection switch for quick and simple programming.
- Operating-mode switch (leading- or trailing-edge dimming).
- Over current, power and temperature protection.
- DIN-rail mounted and only 70 mm wide.


Additional Functions

The following functions may be programmed using the DIGIDIM Toolbox or Designer software:

- Max./Min. levels, Fade times*, Scenes* and Groups*
- Dimmer status report
- System failure level/ignore
- Power on level
- Power on to last level

* These functions are programmable using IR remote.

Connections

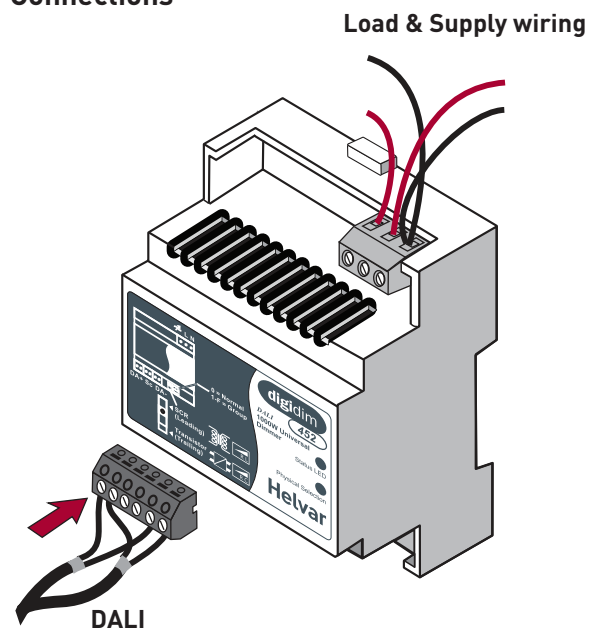

Installation Notes

- Make sure that the operating mode is correct for the installed loads. Before changing the operating mode, isolate the mains supply.
- The external mains supply must be protected. It is recommended that a 6 A MCB is used.
- All cabling must be 230 V mains rated.

Technical Data

Connections

DALI: Removable terminal block
 'Up to 4 mm² solid core or up to 2.5 mm² stranded'
Note: If equipment is used in an electrically noisy environment, ensure the DALI cable is screened and the screen earthed.

Power supply

Mains supply: 85 VAC – 264 VAC, 45 Hz – 65 Hz
Load current: 4.4 A (4.4 A × 230 V = 1000 W)
Heat dissipation: 7 W with maximum load (resistive)
DALI consumption: 2 mA

Mechanical data

Dimensions: 90 mm × 70 mm × 58 mm
Weight: 180 g
IP code: IP30


Operating conditions

Ambient temperature: 0 °C to +40 °C
 Above this temperature, derate according to the adjacent graph
Relative humidity: Max. 90 %, noncondensing
Storage temperature: -10 °C to +70 °C


Conformity and standards

EMC emission: EN 55015
EMC immunity: EN 61547
Safety: EN 60950
Environment: Complies with WEEE and RoHS directives

Load Power Derating vs. Ambient Temperature

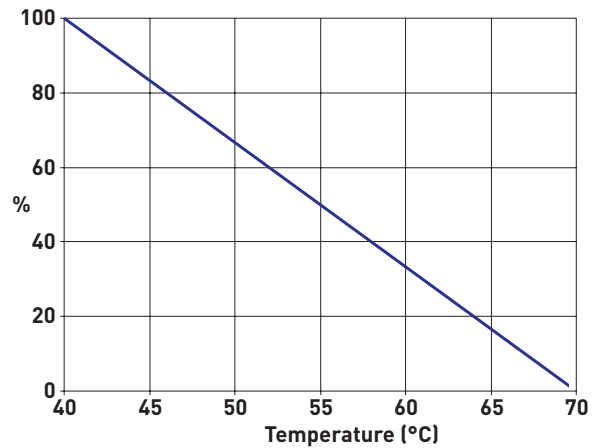

Dimensions (mm)

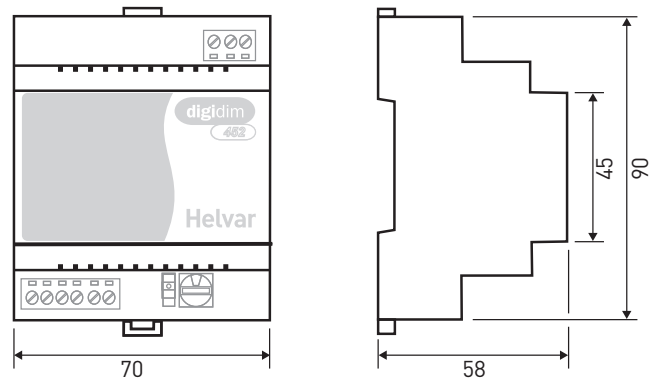

Connections

