



SCI1210

12 Channel x 10 Amp Inductive Lighting Source Controller

Key Features

- 12 x 10 Amp rated source controller
- Dims resistive, inductive and low voltage electronic transformer loads (that are compatible with leading edge dimmers)
- Quiet operation
- 128 scene memory
- Multiple choice of circuit protection
- Security door for MCBs
- Optional RCBO per channel
- Fail to full safety feature
- iCAN network inputs
- DMX input option
- Audio Visual Port (RS485)
- Temperature Monitoring
- Panic/Fire alarm input
- Emergency Lighting Terminals
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards

Overview

This 12 channel unit provides comprehensive features and performance at a truly competitive price. It is fully rated for 40 Amps three phase of continuous inductive lighting load. Whether used for tungsten, low voltage or cold cathode light sources, this unit will provide reliable service over many years. With a 128 scene integral memory, this device offers multiple control options to meet the most demanding specifications.

With iLight's iCAN network connectivity, it has the capability of being linked with a virtually limitless number of other iLight products to build up to any size of system. This product is designed for projects where there are multiple channels of Architectural lighting. It is the perfect choice for hotel ballrooms, atria and large themed restaurants and museums. With an optional DMX512 control input, it is a highly adaptable product.



Powering Business Worldwide

Mechanical

Weight: 18kg
(Double Pole version: 19.5kg RCBO & RCBOX version: 20kg)


Mains Cable Access:
12 x 25.5mm and 1 x PG29 knockouts
Control Cable Access: 1 x 25.5mm knockout

Climate Range:
Temperature: +2°C to +40°C
Humidity: +5 to 95% non condensing
Temperature Monitor: This unit is complete with thermal monitoring. Should it over-heat the unit will automatically switch off

Control Inputs:
Two sets of terminals for the iCANnet™ network
Suitable for Belden 1502
One RJ12 socket for programming the iCANnet™ network
One set of terminals for the Audio Visual Port, RS485
One set of terminals for the panic/fire alarm input

Optional: DMX512 input card (add X to the end of the part number)

Dimensions

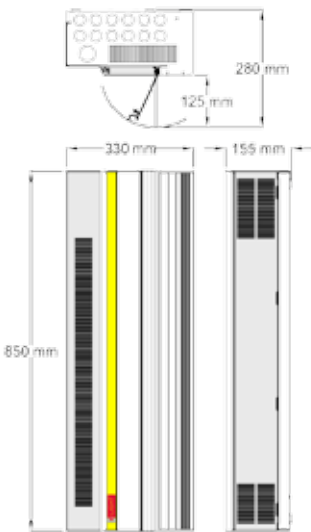

RCBO & RCBOX version: 850 (h) x 374 (w) x 155mm (d)

Electrical

Maximum Load: 40 Amp three phase @ 40°C

Maximum Channel Current: 10 Amps

Supply: 415/230 volts +/- 10% 50/60 Hz
(optionally, 220/127 volt 60 Hz)

Protection: 12 x 10 amp MCBs Type C, 6KA rated, Input isolator.

Options:

SCI1210S - Single pole with isolator
SCI1210N - Neutral disconnect with isolator
SCI1210D - Double pole, no isolator
SCI1210RCBO - RCBO Breakers with isolator
SCI1210RCBOX - 12 x SP MCBs with isolator (For field fit of RCBOs)

Load Types:

Incandescent 230 volt lamp
Inductive Wire wound (allow for 10% transformer losses)
Leading edge electronic transformers
Cold cathode (Check the iLight help desk for details)
Minimum Load: 20 watts inductive load per channel
Dimmed Outputs: 12 x 40 Amp Triacs

Switched Outputs:

The Dimmed outputs may be configured as switches, for non-dimmed loads. They require a minimum load of 30mA for them to latch. Before connecting discharge lamps, consult iLight.

Terminal Sizes:


Incoming supply, max' cable size: 10mm² live, 16mm² neutral
Loads, max' cable size: 1 x 4mm² or 2 x 2.5mm² per circuit
iCANnet™ network cable size: 5 x 1mm²
Audio Visual Port: RS485 2 x 1mm²
Auxiliary over-ride input: 2 x 1mm²

Memory:

FLASH memory to be able to upgrade firmware
EEPROM for 128 scene memory
Fade Times: 0.1 seconds to 60 minutes
Mains Stabilisation: 50:1

Other inductive source controllers: SCI0405, SCI0410, SCI0805, SCI1205, SCI1220 and the SCMI0402

Typical Schematic

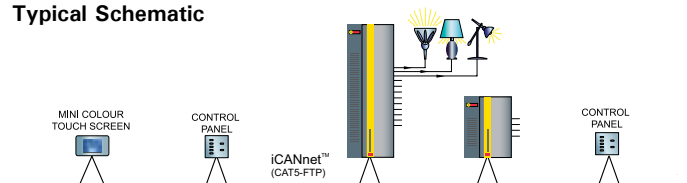

Contact your local Eaton office

T: +44 (0)1923 495495 F: +44 (0)1923 228796
E: enquiries@iLight.co.uk www.iLight.co.uk

Eaton Lighting Systems
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK
eatonlightingsystems.com

© 2018 Eaton
All Rights Reserved

Document No: SCI1210 Rev8 0318

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

EATON

Powering Business Worldwide

CE

