

# SCMD2

## 2 Universe Addressable DALI Controller - DIN Rail mount

### Key Features

- DALI controller – can individually dim, switch and monitor up to 128 DALI addressable ballasts
- 64 groups per DALI universe
- Includes ability to control and test DALI emergency fittings
- Supports Eaton DALI sensors and control panels.
- Connects to the iLight network via screw terminals
- 2 Internal DALI universe power supplies
- Each universe has a dedicated test/override button allowing the installer to test or override the installation prior to commissioning
- DALI universe LED status indicators
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- DIN rail mount with lugs for wall mounting if required
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards



### Overview

The SCMD2 is a 2 universe DALI ballast controller enabling dimming and switching of up to 128 individual addressable DALI devices including luminaires and Eaton DALI relays. Eaton DALI multisensors and control panels can be added to the DALI universes creating a complete DALI solution. Each DALI universe supports up to 64 groups and can monitor the performance of DALI addressable devices and report status back through iCANnet. Emergency light tests and reporting can also be instigated through this versatile lighting controller.

Additional switches and sensors can be connected onto the iCANnet network using iLight's wide range of interfaces.

The compact design of SCMD2 delivers system flexibility as well as reducing installation costs and space used. Being part of the iLight system, it can be seamlessly integrated into flexible architectural lighting schemes with any type of lighting load for commercial and residential applications. Integration with Building Management Systems allows for centralised control and management of the lighting system.

## Mechanical

Weight: 0.35 kg

Operating temperature: +2°C to +50°C


Note: All enclosures must be adequately ventilated

Max storage temperature: +60°C

Humidity: +5 to 95% non-condensing

Environmental protection: IP20

## Dimensions

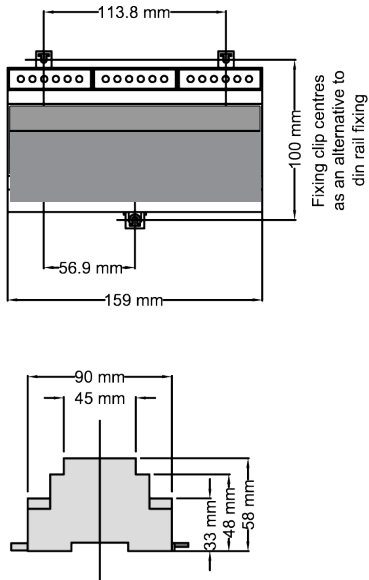

## Electrical

Supply: 230 volts +/- 10%, 50/60 Hz

Terminals max. wire size: 2.5mm<sup>2</sup>

iCANnet™ inputs/output: Screw terminals

DALI output screw terminals: Max wire size 2.5mm<sup>2</sup>


DALI signal: Nominal 16V, max current 250mA supplies to each universe

Maximum load: 3 Amp single phase @ 40°C

Terminals max wire size: 1 x 2.5mm<sup>2</sup> or 2 x 1.5mm<sup>2</sup> per circuit

Protection: Provided by installer - Use supply MCB, 6A or less

## Typical Schematic

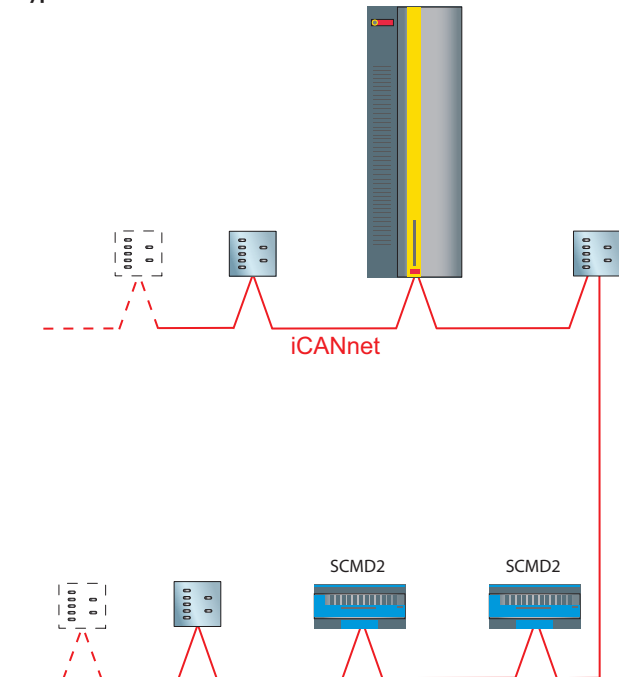

## Contact your local Eaton office

T: +44 (0)1923 495495 F: +44 (0)1923 228796

E: enquiries@iLight.co.uk www.iLight.co.uk

**Eaton Lighting Systems**  
20 Greenhill Crescent,  
Watford Business Park,  
Watford, Herts, WD18 8JA. UK  
eatonlightingsystems.com

© 2018 Eaton  
All Rights Reserved

Document No: SCMD2 Rev2 0418

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

**EATON**

Powering Business Worldwide

CE



FM 664349

