

SCMD4

4 Universe Addressable DALI-2 Controller - DIN Rail mount

Key Features

- DALI-2 controller – can individually dim, switch and monitor up to 256 DALI addressable ballasts
- 64 groups per DALI universe
- Includes ability to control and test DALI emergency fittings
- Supports Eaton DALI sensors and field devices.
- 2 configurable volt free inputs
- DMX control
- RS485 control
- Connects to the iLight network via screw terminals
- 4 Internal 250mA DALI line power supplies
- Each universe has a dedicated test/override button allowing the installer to test or override the installation prior to commissioning
- DALI universe LED status indicators
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- DIN rail mount with lugs for wall mounting if required
- CE & UL compliant
- Designed and manufactured to ISO9001:2015 standards



Overview

The SCMD4 is a 4 universe DALI-2 controller enabling dimming and switching of up to 256 individual addressable DALI devices including luminaires and Eaton DALI relays. Eaton DALI multisensors and control panels can be added to the DALI universes creating a complete DALI solution. Each DALI universe supports up to 64 groups and can monitor the performance of DALI addressable devices and report status back through iCANnet. Emergency light tests and reporting can also be instigated through this versatile lighting controller.

SCMD4 features direct DMX and RS485 control allowing the unit to be integrated with other systems. The switch inputs provide connection to fire or security systems or the use of remote switches and sensors. Additional switches and sensors can be connected onto the iCANnet network using iLight's wide range of interfaces.

The compact design of SCMD4 delivers system flexibility as well as reducing installation costs and space used. Being part of the iLight system, it can be seamlessly integrated into flexible architectural lighting schemes with any type of lighting load for commercial and residential applications. Integration with Building Management Systems allows for centralised control and management of the lighting system.



Powering Business Worldwide

Mechanical

Weight: 0.35 kg

Operating temperature: +2°C to +50°C



Note: All enclosures must be adequately ventilated

Max storage temperature: +60°C

Humidity: +5 to 95% non-condensing

Environmental protection: IP20

Dimensions

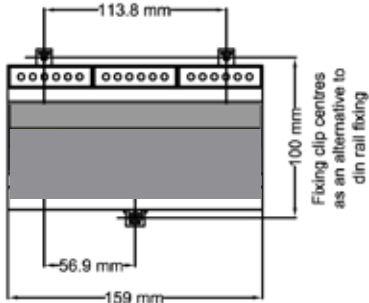

Electrical

Supply: 230 volts +/- 10%, 50/60 Hz

Terminals max. wire size: 2.5mm²

Switch inputs: 2, configurable as break or make, max wire size 2.5mm²

iCANnet™ inputs/output: Screw terminals

Integral iLight Network Power Supply: 15V 500mA

DALI output screw terminals: Max wire size 2.5mm²

DALI signal: Nominal 16V, max current 250mA supplies to each universe. Guaranteed minimum current 245mA
Short circuit protection in accordance with section 6.6.2 of IEC FDIS 62386-101.


DMX signal: Addressable in iCANsoft, DMX512-A

Maximum load: 3 Amp single phase @ 40°C

Terminals max wire size: 1 x 2.5mm² or 2 x 1.5mm² per circuit

Protection: Provided by installer - Use supply MCB, 6A or less

Typical Schematic

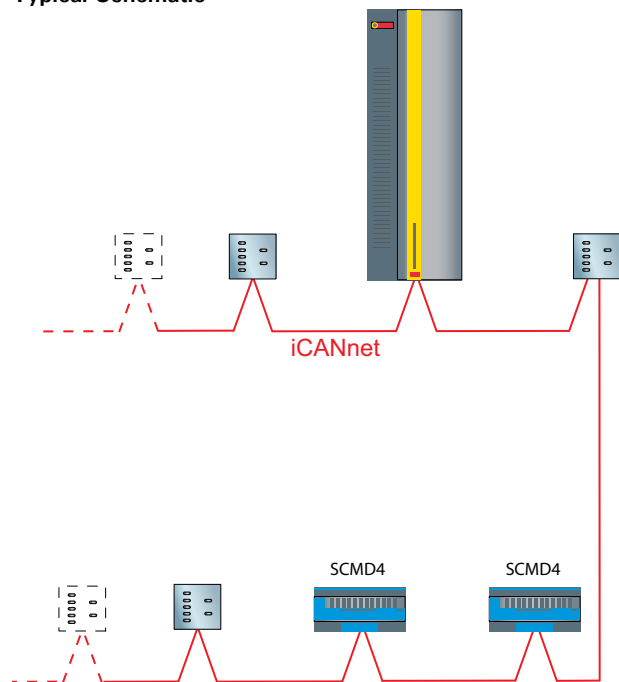

Contact your local Eaton office

T: +44 (0)1923 495495 F: +44 (0)1923 228796

E: enquiries@iLight.co.uk www.iLight.co.uk

Eaton Lighting Systems
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK
eatonlightingsystems.com

© 2018 Eaton
All Rights Reserved

Document No: SCMD4 Rev8 0818

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

EATON

Powering Business Worldwide

