



# DALI


## DALI Control Panel Range

### Key Features

- Integrated DALI communication interface
- Draws power from the DALI communications bus to simplify wiring
- Suitable for standard single gang UK wall box
- Available in Black or White finishes
- Standard or custom engraving on buttons
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards

### Overview


DALI control panels are available in 4 configurations which include the use of a large on/off button control with associated up/down adjustments and a choice of large and small buttons. Individual buttons have backlight indicator lights and strong tactile feedback. There is also a custom button engraving service making DALI control panels fully flexible to meet the needs of your project.

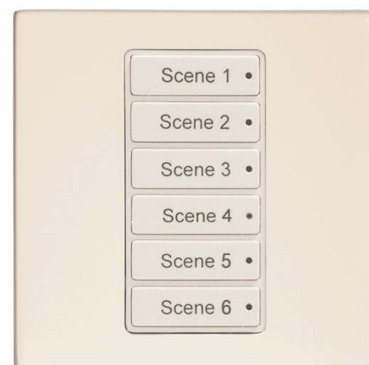

## Button Functions

- Scene selection
- Scene raise/lower
- Channel raise/lower
- Toggle on/off
- Toggle raise/lower
- True off
- Open/close (for curtains or blinds)
- Raise/lower (for motorized screens)
- Task (start/stop a sequence)


## Dimensions

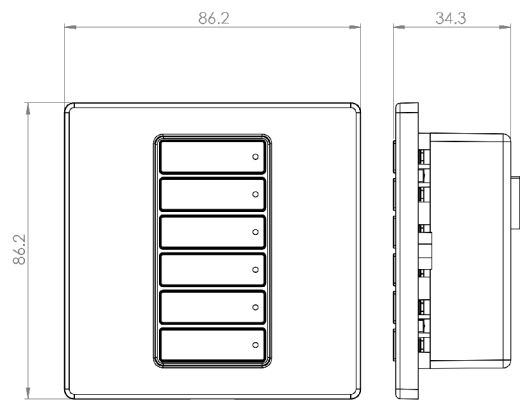

## Mechanical Data

- Buttons include scene, raise, lower, on, off functionality.
- Choice of large or small button caps
- Standard or custom engraving on buttons
- Tap on/off feature to override fade time
- All plastic construction with a separate snap-on surround
- Suitable for standard single gang UK wall box


## Button Configurations

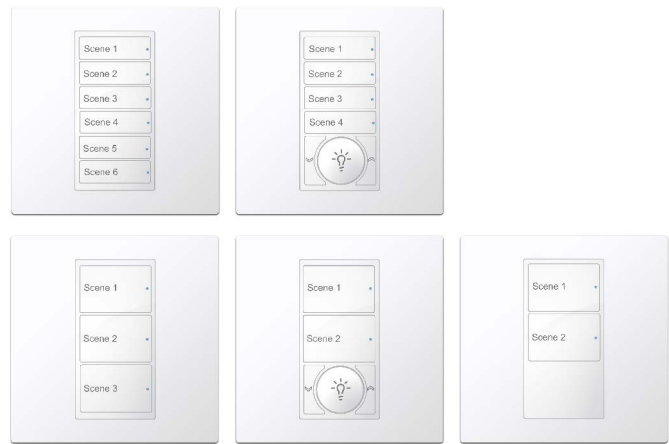

## Electrical Data

- DALI Input Voltage: 9.5 VDC - 22.5 VDC supplied by the DALI communication bus
- DALI Current: Draw 3.75 mA per device
- Temperature Range: 0°C to +40°C
- Humidity: 0% - 95% non condensing
- DALI Wiring: Two-wire, non-polarized control

## Typical Schematic

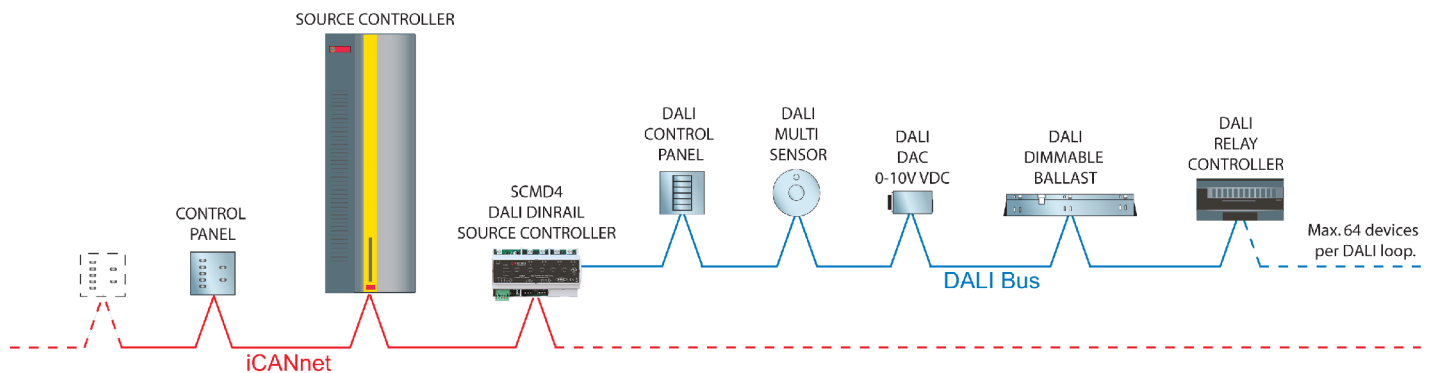

## Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

**Cooper Lighting Solutions**  
20 Greenhill Crescent,  
Watford Business Park,  
Watford, Herts, WD18 8JA. UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

iLight is a registered trademark.

All other trademarks are property of their respective owners.



© 2020 Cooper Lighting Solutions  
All Rights Reserved

DALI Rev5 0520



FM 664349