

CoolLED

LED DRIVERS

CLS 90

Up to 91W

220, 350, 400, 500, 600 & 700mA

CoolLED drivers provide a high performance solution for powering high-brightness LEDs from a mains supply.

The power factor corrected, class I driver is non isolated, delivering up to 91W of power.

All CoolLED Drivers have a high efficiency design, which ensures cool operation and long life. The compact enclosure is available in integral (B) versions.

CoolLED Drivers are open and short-circuit

protected and have a over temperature fold back.

Corridor function built in on DALI version. 10% or 25% switch selectable dim mode.



Product Description

- 220 - 240V
- Touch Dim, DALI, Non Dim or Analogue
- Switchable & non switchable versions
- Programmable output current (DALI Version)
- Hazardous voltage output
- Power factor corrected (0.95)
- Constant current output
- Over temperature foldback
- Non isolated
- Push wire terminal blocks
- Up to 93% efficiency
- Surge protection up to 4kV
- Low standby power (<0.4W)


LOW
Flicker



Harvard Power Systems Limited
1200 Century Way, Leeds, LS15 8ZA United Kingdom
Tel: +44 (0)113 880 5405

LED
SOLUTIONS
www.Harvardps.com

Wiring diagram

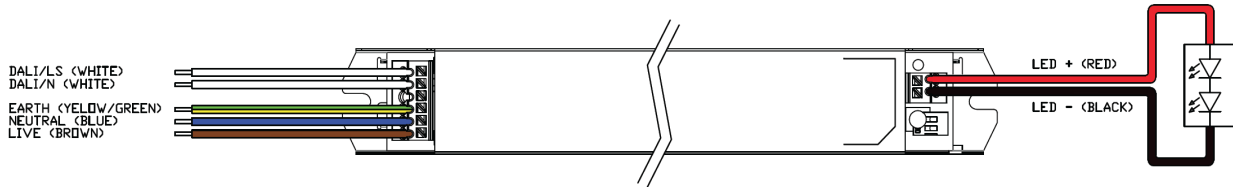

Technical Specification

Mains input voltage	220 - 240V AC rms Nominal
Mains frequency	47- 63Hz
Mains surge protection	4kV common-mode 2kV differential Class 4
Input-output isolation	Non isolated
Humidity	95% max non-condensing
Switch on time	<0.25 (0.6s DALI version)
Maximum output to earth voltage	420V rms
Ambient temperature range	-25°C to 50°C
Maximum Tc temperature	80°C
Ripple	<3%
Input power when output is off	<0.4W
Dimming range	100 - 1% (DALI only)
Terminal blocks	Push wire
Enclosure	Zintec steel
Wire size	0.5mm to 1.5mm ²
Lifetime	100,000 hours @ TC-10

Case Style	Dimensions	Weight	Box Quantity
B - Integral	280mm x 30mm x 21mm	240g	40

Tolerance: + or - 0.5mm

Compliance

Approval	Standards
ENEC	EN 61347-1:2008 +A1:2011 +A2:2013, EN 61347-2-13:2014, EN 62384:2006 +A1:2009 EN 61547: 2009, EN 50015: 2013, EN 61000-3-2:2006 +A1:2009 +A2:2009, EN 61000-3-3:2013




Variants

	Part number	Current (±5%)	LED String Voltage	Output power range	Typical off load voltage	Power factor at full load	Efficiency at full load
Non Dim	CLS90-500S2-240-B-NI	220mA	66 - 182V	15 - 40W	189V	0.95	93%
		350mA		23 - 64W			
	CLS90-700S2-240-B-NI	400mA	60 - 130V	28 - 73W	135V	0.95	92%
		500mA		33 - 91W			
		600mA		24 - 52W			
		700mA		30 - 65W 36 - 78W 42 - 91W			
DALI	CLS90-500S2D-240-B-NI	220mA	66 - 240V	15 - 53W	247V	0.95	93%
		350mA	66 - 240V	23 - 84W	247V		
		400mA	66 - 220V	26 - 88W	226V	0.95	92%
		500mA	66 - 182V	33 - 91W	190V		
	CLS90-700S2D-240-B-NI	400mA	60 - 227V	24 - 91W	232V	0.95	92%
		500mA	60 - 182V	30 - 91W	187V		
		600mA	60 - 151V	36 - 91W	156V	0.95	92%
		700mA	60 - 130V	42 - 91W	135V		
1-10V	CLS90-700S2A-240-B-NI	400mA	60 - 130V	24 - 52W	135V	0.95	92%
	500mA	30 - 65W					
	600mA	36 - 78W					
	700mA	42 - 91W					

*DALI variant includes Touch Dim & Corridor function.

Dimensions

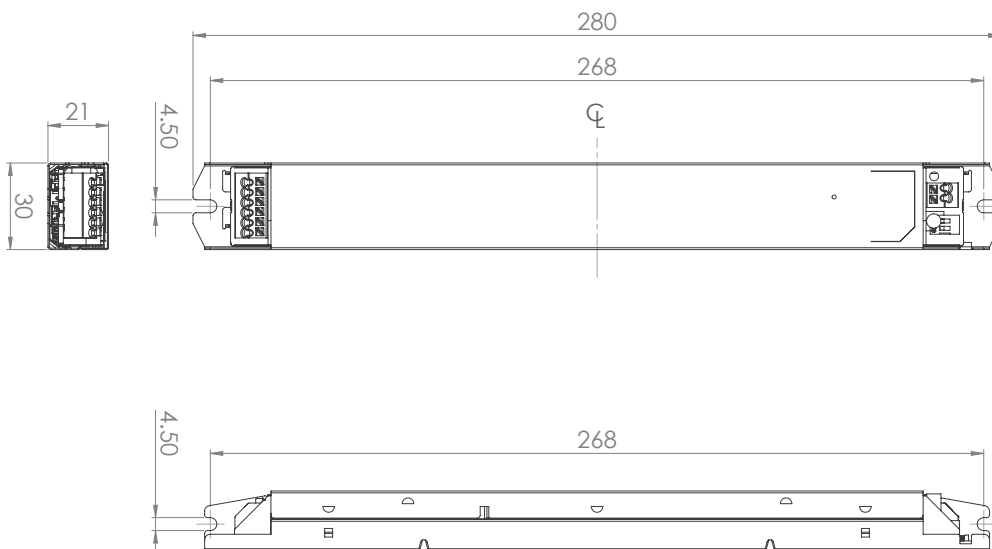

PLEASE NOTE

Information given in this datasheet is for illustration purposes only and subject to change without prior notice. No liability is accepted for printing errors. Reference made to third party approval or certification may be subject to ongoing licence transfers and may not be fully implemented.

