



UIS

Universal Interface - Sensors

Key Features

- 3 x connections for sensors to iCANnet™ network.
- RJ12 type sockets for rapid sensor connection.
- 3 independant daylight linking engines.
- Presence or absence detection support.
- Infra-red support for HH17IR remote controller.
- Supports Infra-red identification.
- 16 Sequences, each with a maximum of 128 actions.
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Status LEDs.
- CE compliant to all relevant standards.
- Designed and manufactured to ISO 9001:2015 standards.

Mechanical

Temperature Range: 0°C to +40°C
Humidity: 5 - 95% non condensing
Material: 2-part aluminum housing.
Mounting: 6 holes for screw mounting.

Electrical

Supply: 12VDC via the iCANnet™ network
Network termination: Screw terminals within two part connectors, able to accept 1.5mm² stranded or solid wire.
3 x RJ12 connections to AXCS01SRJ Combined Sensor and others - Consult iLight for more information.

Overview

The UIS enables 3 separate sensor groups with 6 sensors in total to be connected to iLight's iCANnet™ lighting control network. (Max cable length for each group 30m). Each sensor can be either a single occupancy detector or daylight sensor or a combined PIR, Photocell with built in infra-red control.

Each UIS installed adds three independant daylight linking engines to the network making this unit ideal for maximising daylight harvesting across all areas.


This small compact device can be deployed anywhere on the iCANnet™ network and uses RJ12 sockets and cables for rapid sensor installation.

Accessories:

- AXCS01SRJ - Low Voltage Multi Sensor.
- AXCA05RJ - 5m Cable RJ12 to RJ12 (LSOH)
- AX-FFRJ12 - RJ12 to RJ12 Female Coupler
- AX-2FIMRJ12 - 2 Female to 1 Male Doublor



Dimensions

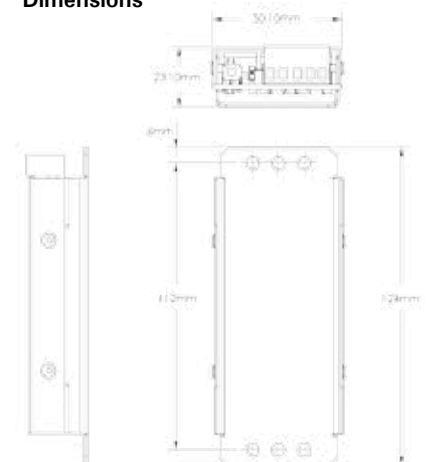

Powering Business Worldwide

Contact your local Eaton office

T: +44 (0)1923 495495 F: +44 (0)1923 228796
E: enquiries@iLight.co.uk www.iLight.co.uk

Eaton Lighting Systems
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK
eatonlightingsystems.com

© 2018 Eaton
All Rights Reserved
Document No: UIS Rev5 0318

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

