

MPM2400

Master Processor Module DINrail Mount

Key Features

- Control unit and power supply for iCANdin™ DINrail mount power dimming, switching and HF units
- Can control up to 24 channels of mixed dimming and switching
- Intelligent controller that can store up to 128 lighting scenes
- Programmed with iCANsoft™ which automatically identifies all switching and dimming units connected for simple network configuration
- Connects into iLight iCANnet™ network and can be used with all standard iLight control panels, interfaces, etc.
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- DINrail mount with lugs for wall mounting if required
- Circuit protection installed separately as required
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2015 standards



Overview

This iCANdin™ Master Processor Module provides both control signals and power for iLight's range of iCANdin™ DIN rail mount power dimmer and switching units (SCM series products). This unit links to these power units with a short serial control cable that loops between the power units within the distribution board.

The controller manages a maximum of 24 channels that can include a mixture of SCM series leading edge dimming, power switching or HF controllers.

The MPM2400 includes a 128 scene integral memory and offers multiple control options to meet the most demanding specifications.

The Controller connects into the iCANnet™ network making it capable of being linked with a virtually limitless number of other iLight products to build up to any size of system.

This product is designed for projects where there are multiple channels of architectural lighting. It is the perfect choice for applications where lower power dimming is required such as residential applications, hotel suites, offices and applications requiring power switching.



Powering Business Worldwide

Mechanical

Weight: 1 kg

Operating temperature: +2°C to +40°C



Note: All enclosures must be adequately ventilated

Max storage temperature: +60°C

Humidity: +5 to 95% non-condensing

Environmental protection: IP20

Dimensions

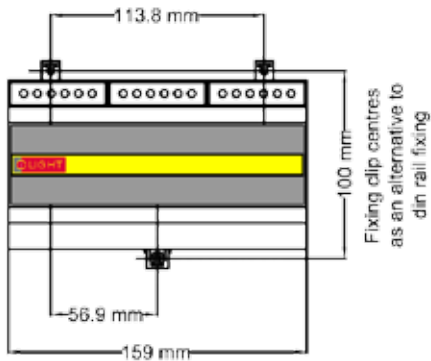

Electrical

Supply: 1A 230 volts +/- 10%, 50/60 Hz

Incoming terminals: max' cable size: 2.5mm²

Supply protection: Provided by installer - Use 6A or less.

Output: 2 connections for serial link to dimming and switching units.

Compatibility with:

SCMI0402, 4 x 2A inductive dimmer

SCMS0410, 4 x 10A relay switching unit

SCMS0810, 8 x 10A relay switching unit

SCMH0410, 4 x 10A relay + 4 x 1-10V HF ballast controller

SCMR0816, 8 x 16A feed through relay unit

SCMC0410, 4 x 10A change over relay & HF controller

Note: SCMA and SCMD do not require MPM2400 and sit directly on the iCANnet™ network


Inputs:

2 x RJ45 for iCANnet™ network

1 x 5way screw terminal for iCANnet™ network

Alarm input

Typical Schematic

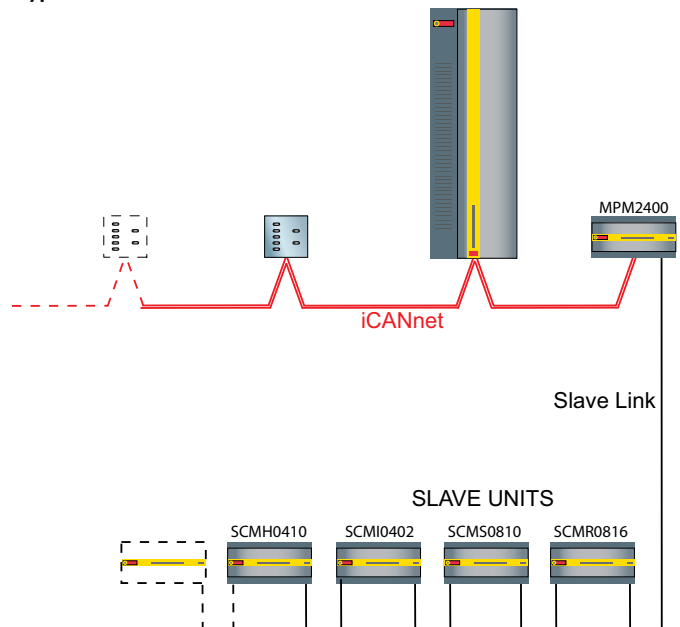

Contact your local Eaton office

T: +44 (0)1923 495495 F: +44 (0)1923 228796

E: enquiries@iLight.co.uk www.iLight.co.uk

Eaton Lighting Systems
20 Greenhill Crescent,
Watford Business Park,
Watford, Herts, WD18 8JA. UK
eatonlightingsystems.com

© 2018 Eaton
All Rights Reserved

Doc. No: MPM2400 Rev12 0318

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

EATON

Powering Business Worldwide

CE

